


Dimensions in ( ) are metric

# DL SERIES DOORS

STANDARD DOOR SIZES	
	NOMINAL DOOR HEIGHTS
NOMINAL DOOR WIDTHS	DL Series 1 3/4"
	6'8"
	7'0"
	7'2"
	7'10"
	8'0"
2'0"	•
2'4"	•
2'6"	•
2'8"	•
2'10"	•
3'0"	•
3'4"	•
3'6"	•
3'8"	•
3'10"	•
4'0"	•

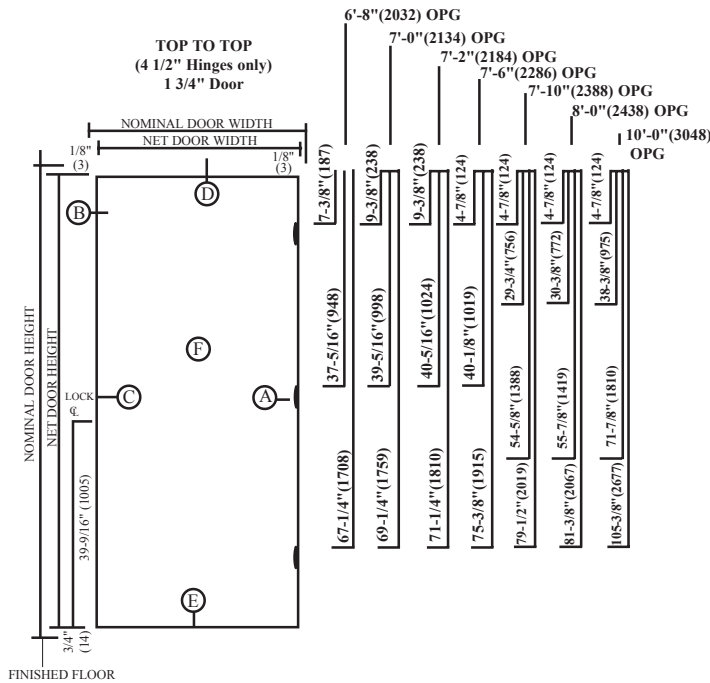

## CONSTRUCTION AVAILABLE

- 20, 18 OR 16 GAGE STEEL
- COLD ROLLED OR A-60 GALV STEEL
- HONEYCOMB CORE
- INSULATED CORE (POLYSTYRENE)
- TEXTURED STEEL

Consult factory for hardware locations not shown.

NOTE: FOR GLASS KIT AND LOUVER DIMENSIONS REFER TO RBP 92-Q

## DOOR CONSTRUCTION DETAILS

<p><b>A</b></p> <p>CONTINUOUS OR SEGMENTED 16 GAGE STEEL INTEGRAL HINGE REINFORCEMENT WITH PROVISION FOR 4 1/2" (114) x 4 1/2" (114) FULL MORTISE TEMPLATE TYPE HINGES.</p>	<p><b>B</b></p> <p>CONTINUOUS 16 GAGE STEEL CHANNEL</p> <p>VISIBLE SEAM</p> <p>SPECIFIED CORE</p>	<p><b>C</b></p> <p>CONTINUOUS 16 GAGE STEEL INTEGRAL MORTISE LOCK REINFORCEMENT WITH PROVISIONS FOR GOV'T SERIES 60 MORTISE LOCKSET AND ANSI A115.1 LOCK FRONT { 1 1/4" (32) x 8" (153) }</p> <p>OR</p> <p>CONTINUOUS 16 GAGE STEEL INTEGRAL CYLINDRICAL LOCK REINFORCEMENT WITH PROVISIONS FOR GOV'T SERIES 160 OR 161 CYLINDRICAL LOCKSETS { 2 3/4" (70) BACKSET } AND ANSI A115.2 LOCK FRONT { 1 1/8" (29) x 2 1/4" (57) }</p>	<p><b>D</b></p> <p>FLUSH TOP CONTINUOUS 16 GAGE STEEL CHANNEL</p> <p>FLUSH TOP</p> <p>STEEL PANEL</p> <p>DOOR TOP</p> <p>12 GAGE CLOSER REINFORCEMENT WHEN SPECIFIED</p>	<p><b>E</b></p> <p>DOOR BOTTOM</p> <p>STEEL PANEL</p> <p>CONTINUOUS INVERTED 16 GAGE STEEL CHANNEL</p>	<p><b>F</b></p> <p>INACTIVE LEAF (OUTSIDE)</p> <p>14 GAGE ASTRAGAL FOR DOUBLE DOORS</p>	<p>VANDAL PROOF BINDER SCREW</p> <p>8-32 PHILLIPS HEAD SCREW</p> <p>ORDER SIZE = INSIDE DIMENSION OF FRAME CUT OUT SIZE = ORDER SIZE + 1 1/2" (38) - 1 5/8" (41) GLASS SIZE = ORDER SIZE + 3/4" (14) 1/4" (6) GLASS ONLY</p>
---	---	---	--	--	---	--

**PROJECT**



**DATE**

**REVISION**

**DRAWN BY**

**SHEET**

**OF**