
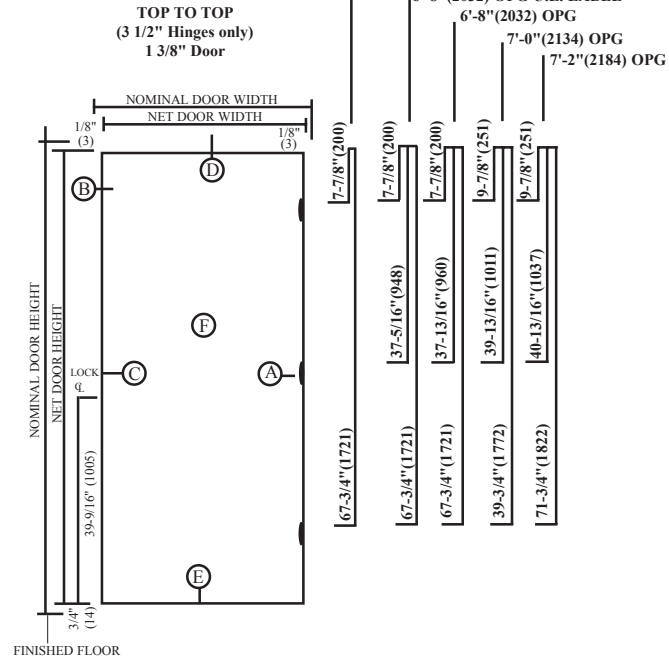


Dimensions in () are metric

DE SERIES DOORS

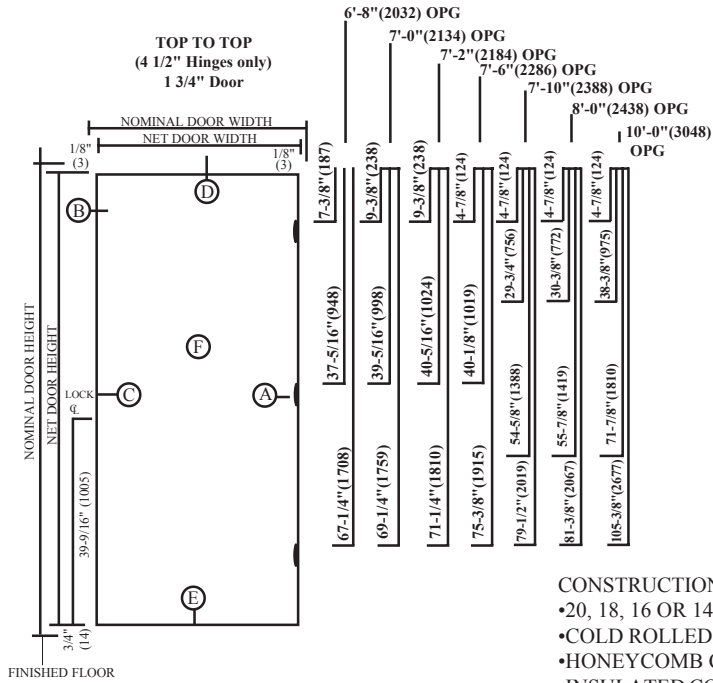

- CONSTRUCTION AVAILABLE
- 20, 18, 16 OR 14 GAGE STEEL
 - COLD ROLLED OR A-60 GALV STEEL
 - HONEYCOMB CORE
 - INSULATED CORE (POLYSTYRENE)
 - TEMPERATURE RISE CORE
 - TEXTURED STEEL

STANDARD DOOR SIZES	
	NOMINAL DOOR HEIGHTS
	DE 1 3/4" - 1 3/8"
NOMINAL DOOR WIDTHS	6'8" 7'0" 7'2" 7'10" 8'0"
2'0"	•
2'4"	•
2'6"	•
2'8"	•
2'10"	•
3'0"	•
3'4"	•
3'6"	•
3'8"	•
3'10"	•
4'0"	•

Consult factory for hardware locations not shown.

NOTE: FOR GLASS KIT AND LOUVER DIMENSIONS REFER TO RBP 92-Q

DOOR CONSTRUCTION DETAILS

<p>A</p> <p>CONTINUOUS 11 GAGE STEEL INTEGRAL HINGE REINFORCEMENT WITH PROVISION FOR 4 1/2" (114) x 4 1/2" (114) FULL MORTISE TEMPLATE TYPE HINGES OR 3 1/2" (89) x 3 1/2" (89) ON 1 3/8" (35) DOORS.</p>	<p>B</p> <p>CONTINUOUS 14 GAGE STEEL CHANNEL</p> <p>VISIBLE SEAM</p> <p>SPECIFIED CORE</p>	<p>C</p> <p>CONTINUOUS 14 GAGE STEEL INTEGRAL MORTISE LOCK REINFORCEMENT WITH PROVISIONS FOR GOV'T SERIES 60 MORTISE LOCKSET AND ANSI A115.1 LOCK FRONT {1 1/4" (32) x 6" (153)} (MORTISE NOT AVAILABLE IN 1 3/8" (35) DOORS)</p> <p>OR</p> <p>CONTINUOUS 14 GAGE STEEL INTEGRAL CYLINDRICAL LOCK REINFORCEMENT WITH PROVISIONS FOR GOV'T SERIES 160 OR 161 CYLINDRICAL LOCKSETS {2 3/4" (70) BACKSET} AND ANSI A115.2 LOCK FRONT {1 1/8" (29) x 2 1/4" (57)}</p>	<p>D</p> <p>FLUSH TOP CONTINUOUS 16 GAGE STEEL CHANNEL</p> <p>DOOR TOP</p> <p>12 GAGE CLOSER REINFORCEMENT WHEN SPECIFIED</p>	<p>E</p> <p>DOOR BOTTOM</p> <p>CONTINUOUS INVERTED 16 GAGE STEEL CHANNEL</p>	<p>F</p> <p>14 GAGE ASTRAGAL FOR DOUBLE DOORS</p>	<p>VANDAL PROOF BINDER SCREW</p> <p>8-32 PHILLIPS HEAD SCREW</p> <p>ORDER SIZE = INSIDE DIMENSION OF FRAME CUT OUT SIZE = ORDER SIZE + 1 1/2" (38) - 1 5/8" (41) GLASS SIZE = ORDER SIZE + 3/4" (14) 1/4" (6) GLASS ONLY</p>
--	---	--	--	---	--	--

PROJECT		DATE	DRAWN BY
		REVISION	SHEET OF